

Product description

Variants

Order No.

## Centralized numerical busbar protection 7SS60

### Measuring system 50, 60, 16,7 Hz

Housing 7XP20, 1/6 19-inch  
3 BI, 2 CR, 2 AR, 1 Life contact  
Firmware V3

Rated current / frequency

100mA; 50, 60 Hz  
100mA; 16,7 Hz

Rated auxiliary voltage


DC 24 V to 48 V  
DC 60 V to 125 V <sup>1)</sup>  
DC 220 V to 250 V <sup>1)</sup>

Construction

Flush-mounting  
housing 1/6 19-inch

Measuring system

Standard

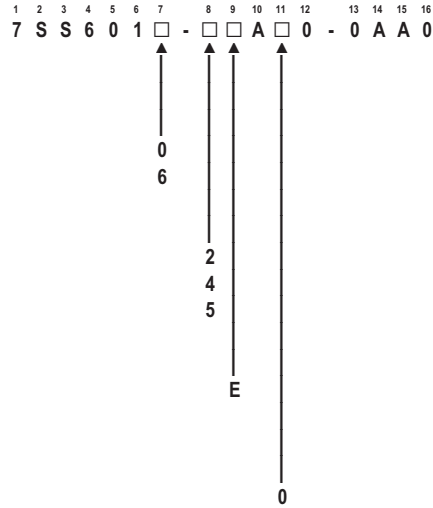


### Stabilizing / Command output module

5 stabilizing CTs,  
5 relays with 2 NO contacts  
DC 48/60 V, DC 110/125 V, DC 220/250 V settable

7 T M 7 0 0 0 - 0 A A 0 0 - 0 A A 0

### Isolator replica / Preference module

DC 48 V to 60 V  
DC 110 V to 125 V  
DC 220 V to 250 V

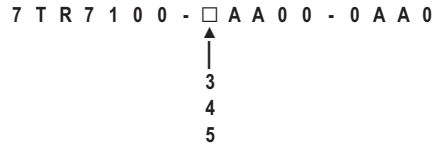

### Command output module

8 relays with 2 NO contacts  
DC 48/60 V, DC 110/125 V, DC 220/250 V settable

7 T S 7 2 0 0 - 0 A A 0 0 - 0 A A 0

### Housing 1/2 19"

for 4 peripheral modules 7SS60  
for Flush-mounting

7 X P 2 0 4 1 - 2 M A 0 0 - 0 A A 0